


Yamaha FJR1300 seat heater installation instructions



Place controller in desired location using hook and loop adhesive strip provided. Remove the panels above the battery and below the right hand instrument display.

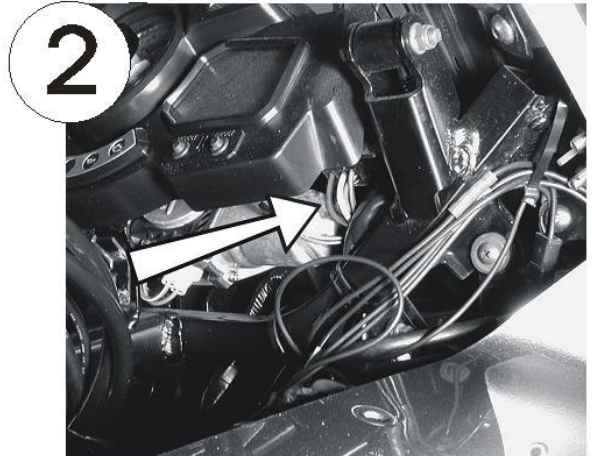

Find the green with blue striped wire as shown above. This is where you should splice the bare red wire from the relay. Connect the red wire with the in-line fuse to the positive battery terminal. Now connect the loose black wire coming off of the relay to the negative battery terminal.

negative battery connector

splice to blue/green wire in figure 2

positive battery connector

relay


relay/controller connection

seat connector

controller

Lift the tank and connect the provided extension cable to the heater controller wire. Route the cable through the frame hole shown below. Run wires under the tank to the seat area.

Next plug the connector into seat heater connector. Lower the tank, clean up the wiring with zip ties, assemble your bike and enjoy your new heated seat!

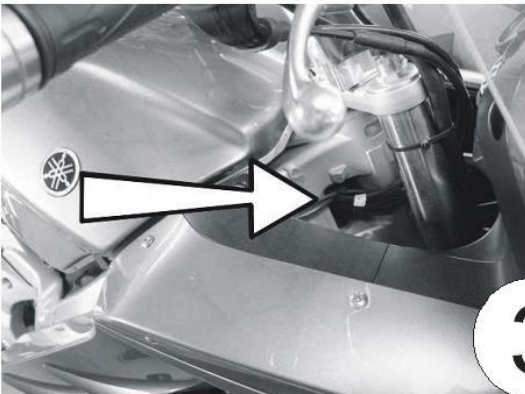

SARGENT CYCLE PRODUCTS
 1-800-749-SEAT
 FAX 904-354-7979
 WWW.SARGENTCYCLE.COM