


**PD8000 Mortise Locks with Surface Pulls for Sliding/Barn Doors**

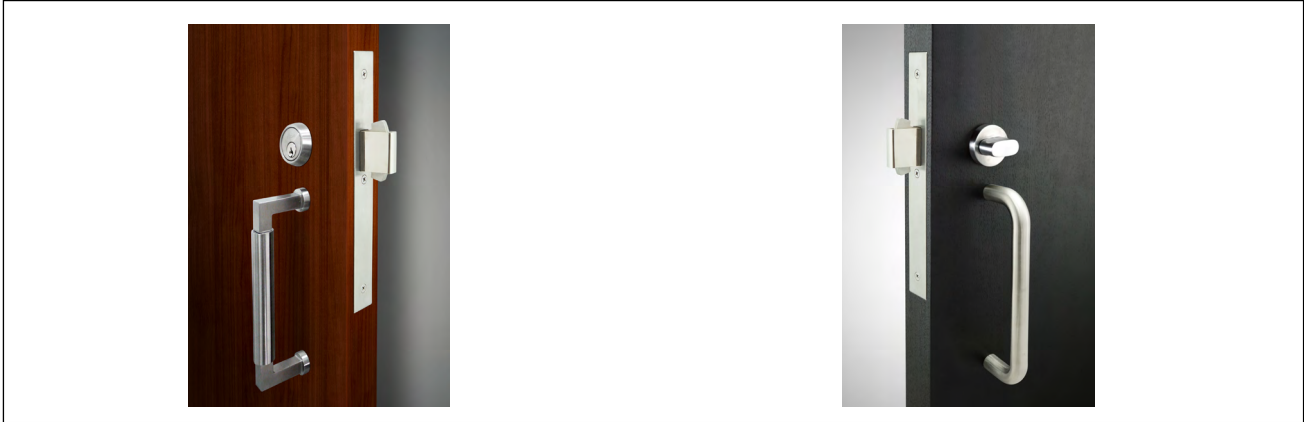

**Application**

For residential or commercial application.

**Specification**

Standard Door Thickness: 1-3/4"(45mm), Thick door kits available  
 Backset: 2-3/4"(70mm)  
 Handing: Non-Handed  
 Thumb-turn Spindle: 5x5mm square  
 Lock Case: 3-21/32" x 6" x 11/16" (93 x 152 x 17mm)  
 Deadbolt: 1"(25.4mm)  
 Cylinder: Schlage C keyway 5 pin mortise cylinder with 2 keys (KD). Keying Services available. Order Separately.

**Material**

Surface Pull: Stainless Steel  
 Lockcase: Heave Gauge Plated Steel  
 Faceplate Strike: Stainless Steel  
 Cylinder: Solid Brass with Stainless Steel Face Cover

**Finish**


32D - (630) Satin Stainless Steel  
 32 - (629) Bright Stainless Steel  
 PVD3 - Brass Color  
 PVD Finish on Stainless Steel

**Functions**

	<p><b>PD8215</b>  <b>Passage w/Lockcase as Dust Proof Strike</b>                  Lockcase used as dust proof strike on pair of doors inactive side.</p>		<p><b>PD8340</b>  <b>Privacy w/Emergency Release</b>                  Deadbolt operated by inside thumb-turn or outside emergency release coin turn.</p>
	<p><b>BTB</b>  <b>Dummy/Passage without Lock Case</b></p>		<p><b>PD8350</b>  <b>Entry w/Single Cylinder</b>                  Key outside or thumb-turn inside retracts deadbolt.</p>
			<p><b>PD8360</b>  <b>Patio</b>                  Deadbolt operated by thumbturn from inside only.</p>

**PD8000 Mortise Locks with Surface Pulls for Sliding/Barn Doors**

## ADA Compliance

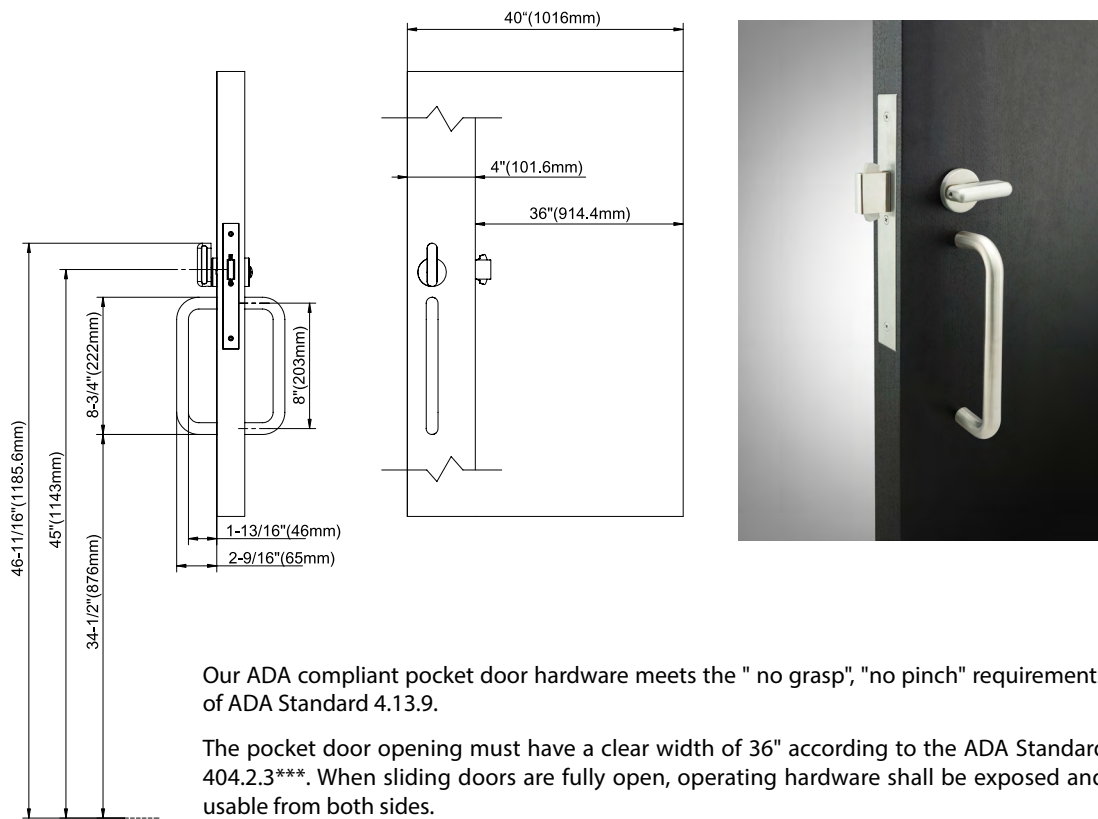

Our ADA compliant pocket door hardware meets the "no grasp", "no pinch" requirements of ADA Standard 4.13.9.

The pocket door opening must have a clear width of 36" according to the ADA Standard 404.2.3\*\*\*. When sliding doors are fully open, operating hardware shall be exposed and usable from both sides.

To accommodate these requirements, the total pocket door opening must be a MINIMUM of 40". The door must protrude a minimum of 4" from the jamb in order to install the ADA pocket door hardware on the door.

The hardware must be installed 34" above the finished floor or ground, giving the hardware a height of 47" (the maximum is 48") from the finished floor, meeting ADA Standard 404.2.7\*\*\*.

**\*\*\* The ADA Standard 404.2.3 is from the Department of Justice ADA Publication dated September 15, 2012. Unison Hardware, Inc. recommends the end user to double check all State and Federal standards for your particular project.**