

**BMW R 1100 / 1150 GS  
FRONT & REAR MOUNTING HARDWARE  
INSTALLATION GUIDE**

**Tools Required**

5mm allen wrench

**Installation Prep**


To prepare your new Sargent World Sport Seat for mounting, you will need to remove your stock mounting brackets from your current seats, both front and rear, and mount it onto your new World Sport Performance Seat.

**Installation, Front Seat**

This will only require about 5 minutes of your time and a 5mm allen wrench.

Remove the 4 bolts from your OEM seat as shown in the diagram. In most cases, the bolts and bushings will remain in place on the bracket when removed, but take care to insure none fall away when it is removed from the pan.

Reassemble the mounting bracket onto your new World Sport Performance Seat and snug the bolts to secure. (See detailed inset)

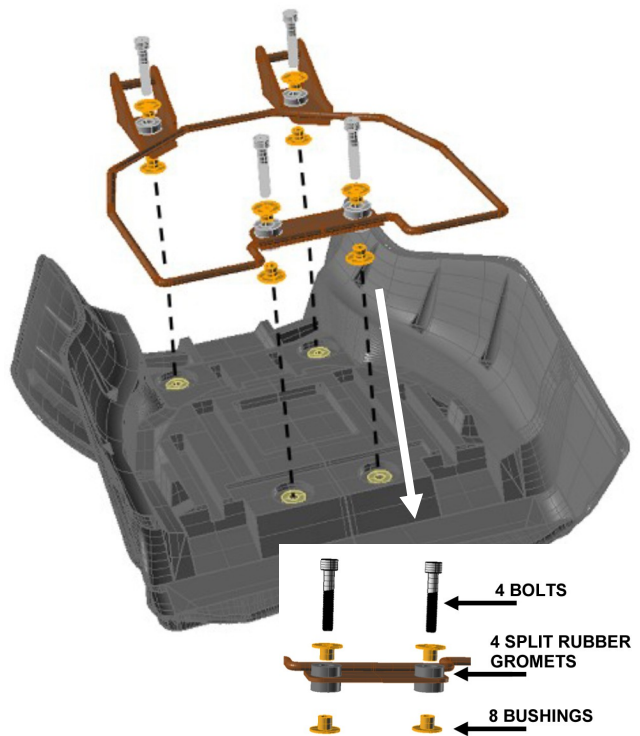

**Installation, Rear Seat**

Remove the 2 bolts and latching wire from your OEM rear seat and install them onto your new Sargent Seat, as shown, and snug the bolts to secure.

Mount your new Sargent Seat to your motorcycle and you're ready to ride!

