Installation Instructions


Kit NGX SERIES COIN BLOCKOUT Kit #26685001


These instructions outline the procedures to install a Blockout for the Imonex coin accepter into your NGX and NGX MINI jukeboxes.

Tools Required

1/4 Nut Driver.

Parts Included with this Kit:

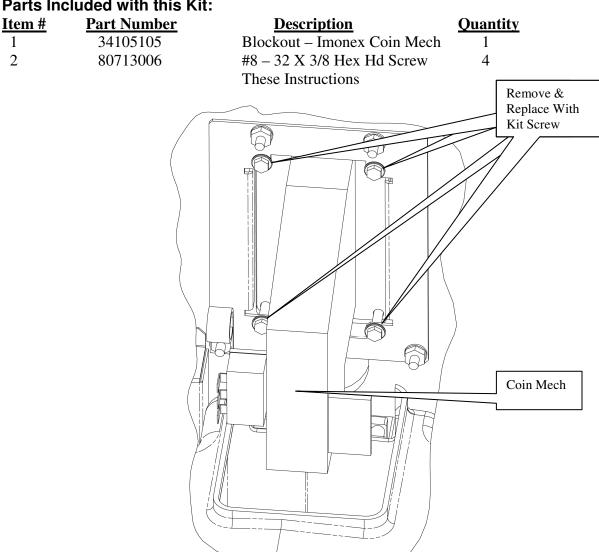





Installing a Coin Blockout requires removal of the Coin Mech. The following procedure is applicable for any position (side or center) of the Coin Mech. Follow the step by step instructions to install this kit.

- 1. Power off and unplug the jukebox. Open the front or currency module door to gain access to the back of the Coin Mech.
- 2. Disconnect the wiring to the Coin mech.
- 3. Referring to Figure 1, remove the four screws fastening the Coin Mech to the door and remove the Coin Mech.
- 4. Place the kit supplied Coin Mech Blockout in place of the just removed Coin Mech on the front of the jukebox door/ currency module and using the kit supplied #8-32 X 3/8 screws, fasten the blockout in place.



