

# VintageView®

## WINE STORAGE SYSTEM

## MAG1 and MAG2 Wall Mount Wine Rack Instructions

Wine Master Cellars • 10645 E 47th Ave, Denver, CO 80239 • phone: 866.650.1500 • fax: 866.650.1501  
Please feel free to contact us regarding the assembly of this product.

### MAG1 or MAG2 contains:

- 1 Neck Strip
- 1 Base Strip
- 2 Plastic Couplers
- 6 Rubber Mounting Hole Caps

Before starting, open all Packaging for the MAG1 or MAG2 and take inventory to make sure you have everything.

### Tools Needed:

- 1 Spirit Level
- 1 Tape Measure
- Drill and Drill Bits (Necessary in Some Cases)
- 1 Marking Pen or Pencil
- 1 Screwdriver

### Fasteners:

There are three pre-drilled mounting holes in each strip, six total per rack. Appropriate fasteners must be utilized in every mounting hole for proper installation. Fasteners are not included with your MAG1 or MAG2. However, we recommend the following fasteners for these surfaces:

- Wood Surface: #8 x 1-1/4" wood screw
- Drywall/Wallboard Surface: #8 x 1-1/4" screw with spiral inserts for the bottom two holes in each strip (4 total) and an expanding hollow wall anchor such as a toggle bolt for the top hole in each strip (2 total)
- Concrete, Brick or Stucco: 3/16" x 1 3/4" masonry screw or #8 x 1 1/4" screw with appropriate size expanding anchor

NOTE: If you are attaching the MAG1 or MAG2 to a VintageView® Floor to Ceiling Frame (FCF) you will attach the units to the FCF using the self-drilling screws included in the FCF packaging.

## MAG1 and MAG2 Installation Instructions

1 - Determine which direction the bottle necks should point.

- 1.1. If the bottle necks are to point to the right, the base strip must be installed to the left of the neck strip.
- 1.2. If the bottle necks are to point to the left, the base strip must be installed to the right of the neck strip.

2 - Lay out the wall. (Fig. 1)

- 2.1. The centerline of the first strip (either base or neck depending on bottle neck direction) should be at least 3-1/4" from adjacent walls or obstructions. This allows for the bottle to overhang the rack.
- 2.2. From centerline of the first strip, measure 8-1/2" to the centerline of the next strip.

Note: This dimension may be altered for specific bottle sizes. If using the MAG1 or MAG2 racks for sparkling wines/Champagne, we recommend using 7-1/2" as a centerline-to-centerline measurement between the neck and the base strips.

- 2.3. (For multiple columns) locate the centerline of the next strip 6" away from the prior strip.
- 2.4. (For multiple columns) continue marking the centerlines, alternating between 8-1/2" (or 7-1/2" for sparkling wines/Champagne) and 6" increments.

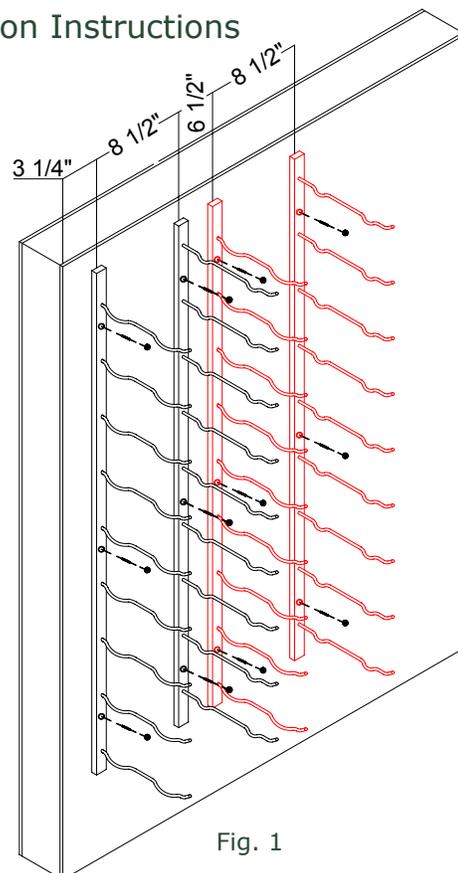


Fig. 1

3 - Determine appropriate fasteners for the wall surface and fasten the strips to the wall.

3.1. Reference the Fasteners section for recommended fastener types.

3.2. Using a level, ensure that each strip is plumb prior to securing it to the wall.

3.3. Note that the tops of the strips should be even. (Bottles resting on the rack will have a slight neck-down tilt).

3.4. Secure the rack to the wall, using the appropriate fasteners, through the pre-drilled mounting holes.

4 - Insert the Mounting Hole Caps.

4.1. Remove the round rubber mounting hole caps from the bag and snap them into place in the back strip.

5 - Stacking racks (Optional). (Fig. 2)

5.1. When stacking racks, carefully remove the black plastic end caps from the top of the lower strips and from the bottom of the upper strips.

5.2. Fasten the lower strips to the wall per the above directions, insert the provided black plastic couplers in the bottom of the upper strips and slide the strip into place such that the bottom of the coupler slides into the lower strip.

5.3. Fasten the upper strip in place per the instructions in step 3.


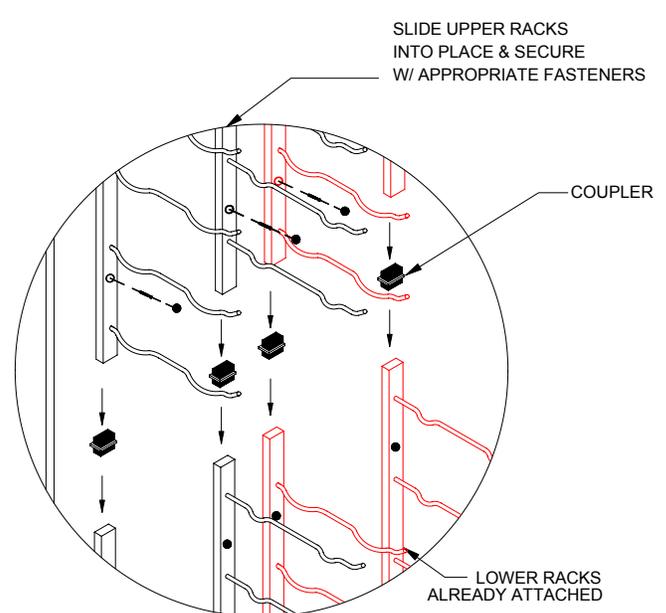


Fig. 2

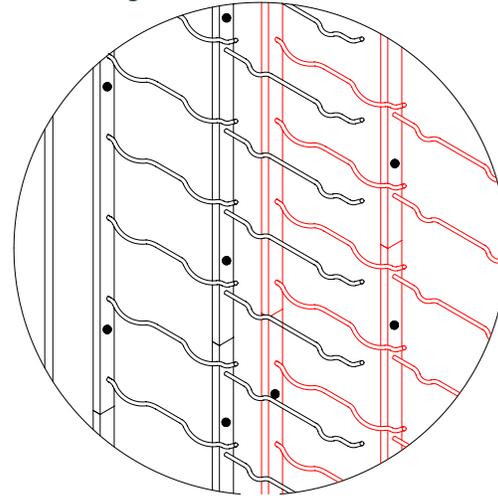

## Warranty

Wine Master Cellars ("WMC") warrants to the original consumer-purchaser that this product shall be free from defects in workmanship and materials under normal and reasonable use for the lifetime of the product.

WMC will, at its option, refinish or replace any product or part found to be defective during the warranty period and excludes installation charges, shipping charges, and cost of removal and reinstallation. WMC may require you to return the part(s) claimed to be defective, for its inspection - freight or postage prepaid.

This warranty does not include the cost of any inconvenience or property damage due to the failure of the product and does not cover damage due to misuse, abuse, accident, or damage arising out of transportation of this product. THIS WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER OBLIGATIONS, LIABILITIES OR WARRANTIES. In no event shall WMC be liable or responsible for INCIDENTAL OR CONSEQUENTIAL DAMAGES or for any other direct or indirect damage, loss, cost, expense or fee. Neither the WMC distributor nor the retail establishment selling this product has any authority to make any warranties or to promise remedies in addition to or inconsistent with those stated above. WMC's maximum liability, in any event, shall not exceed the purchase price of the product paid by the original consumer-purchaser. Some states do not allow the exclusion or limitation of incidental or consequential damages. In such a case, the above limitations or exclusions may not be applicable.

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.