


BSL77P

ProCage™ “Black Series” 7’x7’ L-Screen ASSEMBLY INSTRUCTIONS

BOX CONTENTS


Description	Quantity
• #1 piece with two reduced ends	6 each
• #2 piece with two reduced ends	1 each
• #3 piece with two open ends	1 each
• #4 piece bottom “T” with open ends	1 each
• #5 piece top “U” piece with open ends	1 each
• #6 piece elbow piece with one reduced end	1 each
• #7 piece small “T” fitting open ends	1 each
• 4-Way bottom leg pieces	2 each
• Pillowcase-style net with lacing cord	1 each

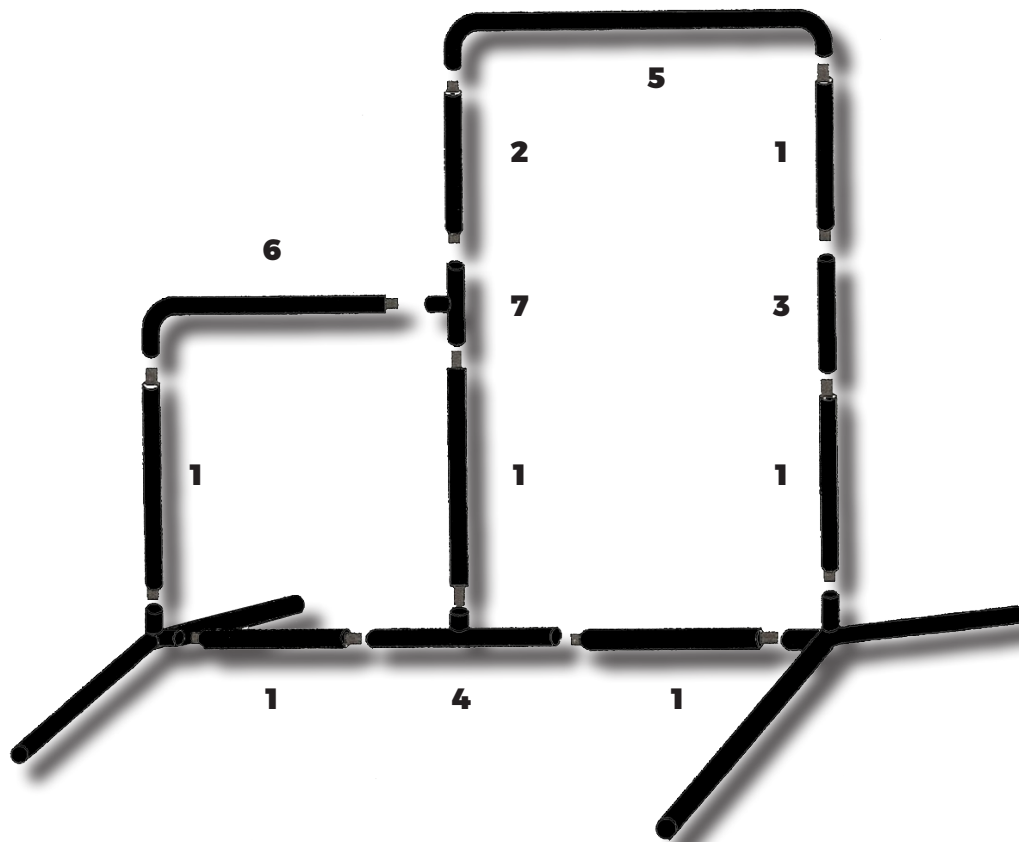

Note: Nets and frame should be inspected prior to each use. **DO NOT** use protective screen if holes are present in the netting. Repair or replace net before use. This screen **IS NOT** designed for short toss or close hitting drills. For use of this protective screen in batting cage setting we recommend adding Item # **B77PAD** kit designed for this frame.

Please call 888-313-1303 to order or visit us on the web www.trigonsports.com.


STEP 1

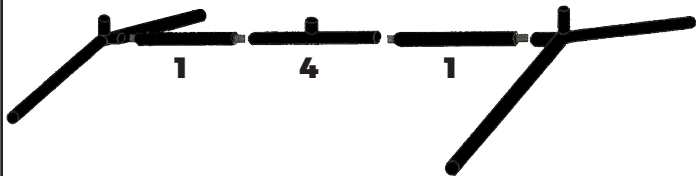

Using diagram shown start with bottom pieces and attach using push button assembly.


NOTE: Be sure 4-way bottom legs for a 'V' off the ground.

STEP 2

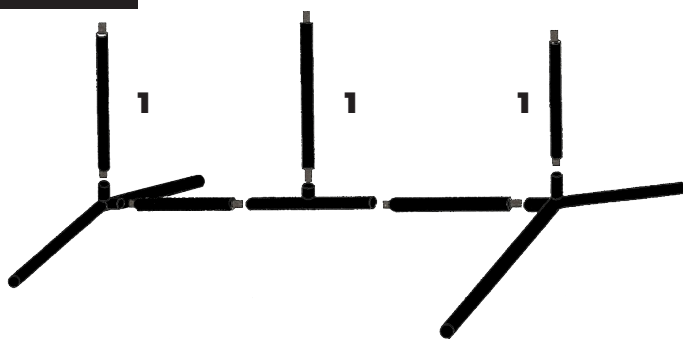


Attach (3) upright pieces Part #1 as shown.

STEP 3

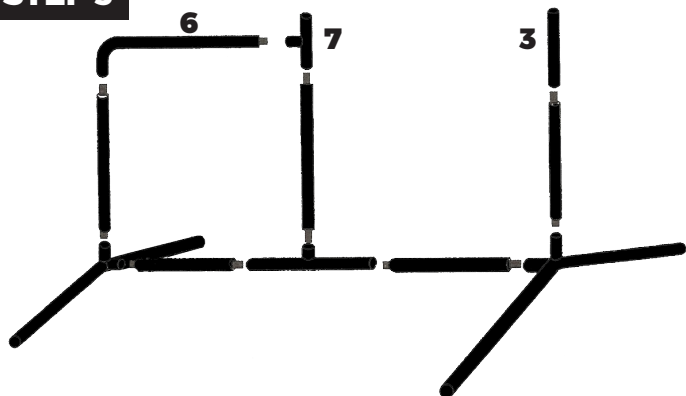

Attach Part #6, Part #7, and Part #3 per diagram.


STEP 4

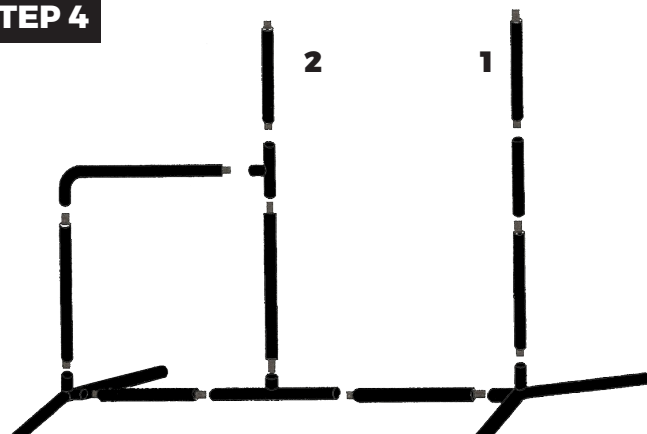

Add Part #2 and Part #1 per diagram.

NOTE: Be sure part #2 is only used in position above part #7 T-fitting.


STEP 5

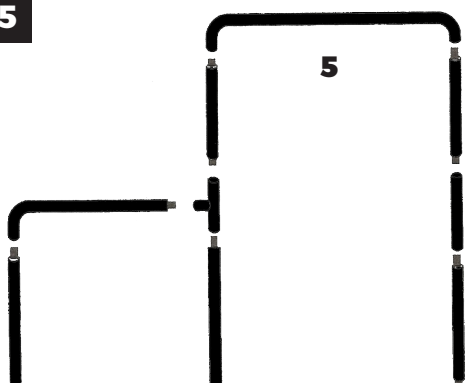

Add top 'U' piece #5

NOTE: Be sure all push buttons on frame are seated properly.

ASSEMBLED SCREEN

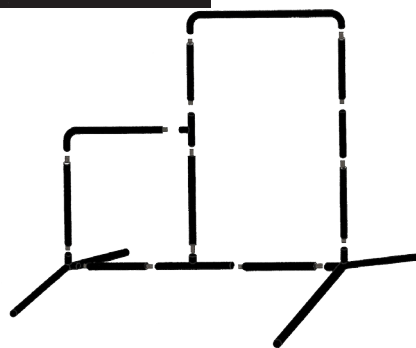

Add net by sliding over top frame. Net should fit like a "pillow case". Use lacing twine provided to secure net opening to bottom rail.