

Kawasaki ZX-14, ZZR-1400
World Sport Performance Seat WS-598/599

Cowl Transition Pad
(part # SCP-0170)




Read complete instructions before starting installation.



Read complete instructions before starting installation.

Installation Instructions:

- 1** Install the two Rubber Standoffs "S" (shown left), included in the kit, into the back of the base pan as shown. **IMPORTANT:** These standoffs **MUST be in place** when installing the Transition Pad onto the cowl, and must remain in place at all times when cowl is being used. **NOTE:** The Standoffs **MUST be removed** when installing other rear accessories.

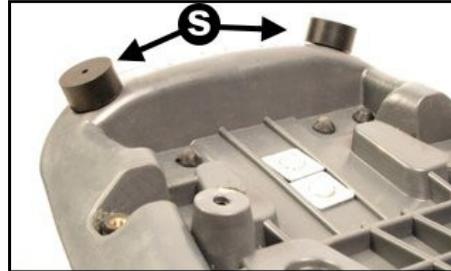

- 2** Install the cowl and "test fit" the Transition Pad. **NOTE:** To install the cowl onto the Sargent Base Pan, you must use the 5mm hex bolts supplied and pre-installed in the pan (not the stock screws). Now "Test Fit" the Transition Pad to get a feel for its best positioning. Read steps 3 and 4 below and practice the installation technique a few times before removing the double stick tape backing.

- 3** Be sure the cowl surface contact area is clean and dry. Remove the double stick tape backing and carefully place the pad into position, paying close attention to the center alignment (as indicated by yellow dotted line (right)). **VERY IMPORTANT:** Start at the front edge (as indicated by red line- right), keeping the **entire** front edge in contact with the vinyl seat cover, **all the way down to lower corners "A"** as indicated.



- 4** While holding the front edge and corners "A" in contact with upholstery, "rock" the Transition Pad back to make full contact with cowl. Press **gently** into place. **NOTE:** It is possible carefully remove the pad and make a subsequent attempts if required, however, subsequent attempts should be kept to a minimum to avoid compromising the adhesive's effectiveness. Once satisfied with the positioning, **press firmly** into place.