

# Direct Mount Temperature Switchgage®

## SDB Series (For Gas Compressor Cylinder Discharge Temperatures)

The SDB Series are direct-mounting temperature Switchgage devices. They provide an accurate direct-reading gage with an adjustable limit switch to activate alarms and/or shutdown. A knob on front of the Switchgage instrument allows you to adjust the limit switch trip point. Pointer movement is actuated by a bi-metallic sensing element.

Models SDB500, SDB501 and SDB500EX have a temperature range of 100° to 500°F (40° to 260°C). SDB500EX enclosure is explosion-proof and CSA listed for Class I, Group C and D hazardous locations.

The SDB1000 has a temperature range of 200° to 1000°F (100° to 500°C).

The most common use of the SDB Series is to monitor gas compressor temperatures. Engine exhaust temperature can also be monitored to indicate overloading or lean fuel mixtures, or use the SDB to help coordinate loads on twin-engine installations.



\* Products covered by this bulletin comply with EMC Council directive 89/336/EEC regarding electromagnetic compatibility except as noted.

### Specifications

#### Temperature Ranges:

SDB500, SDB500EX and SDB501: 100° to 500°F (40° to 260°C)  
SDB1000: 200° to 1000°F (100° to 500°C)

**Sensing Bulb Material and Size:** 304 stainless steel; 1/2 in. dia. x 4 in. insertion depth (13 x 102 mm)

**Maximum Bulb Pressure:** 285 psi (1.97 MPa) [19.7 bar] at 625°F (329°C) **NOTE:** Use of a thermowell is recommended.

**Process Connection:** 1/2 NPTF; 3/4 NPT adapter available

**Sensing Element:** High torque bi-metal element in heliarc welded stainless steel bulb

**Contact Rating:** SDB500, SDB501 and SDB1000: 2 A @ 30 VAC  
SDB500EX: 2 A @ 120 VAC

**Limit Contact Adjustment:** By knob through full range

#### Maximum Unit Temperature:

SDB500, SDB500EX, SDB501: 625°F (329°C)  
SDB1000: 1250°F (677°C)

**Case Material:** SDB501: Die-cast aluminum; SDB500, SDB1000, SDB500EX: Sand-cast aluminum

**Switchgage Accuracy:** ± 3% of full scale; **NOTE:** All models are calibrated for use with a thermowell. Specify when a thermowell is NOT to be used when ordering.

**Wire:** 18 AWG (1.0 mm<sup>2</sup>). See Dimensions for lengths.

**Dial:** Black print on stainless steel. Dials are scaled in degrees Fahrenheit and Celsius.

#### Approximate Shipping Weight:


SDB501: 1 lb. 4 oz. (0.57 kg)  
SDB500 and SDB1000: 2 lb. (1.0 kg)  
SDB500EX: 2 lb. 5 oz. (1.05 kg)

#### Approximate Shipping Dimensions:


SDB501: 8-1/4 x 4-1/4 x 4-1/2 in. (210 x 108 x 114 mm)  
SDB500 and SDB1000: 8-1/4 x 4-1/4 x 4-1/2 in. (210 x 108 x 114 mm)  
SDB500EX: 9 x 5-1/2 x 6 in. (229 x 140 x 152 mm)

### Dimensions

#### SDB500, SDB500EX and SDB1000

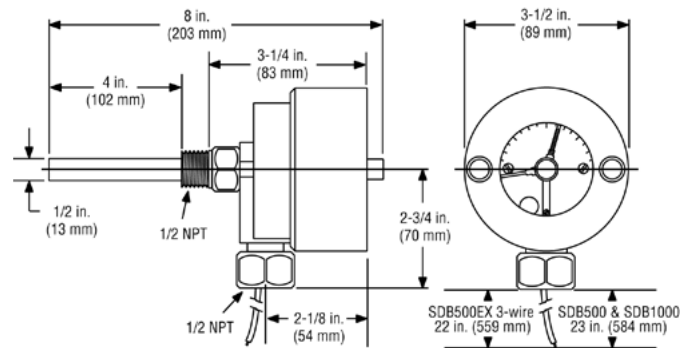

#### SDB501

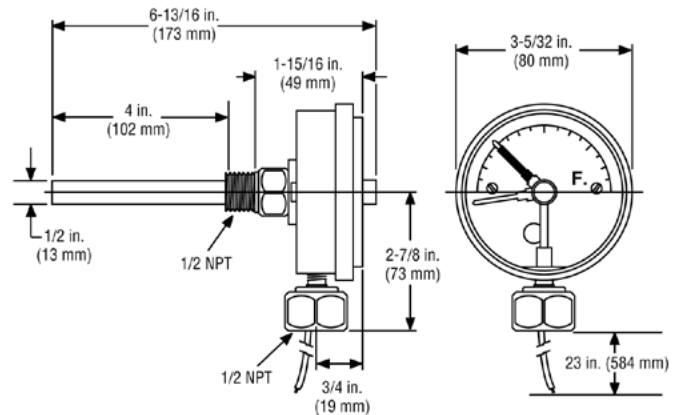

**Warranty** — A limited warranty on materials and workmanship is given with this Murphy product. A copy of the warranty may be viewed or printed by going to [www.fwmurphy.com/support/warranty.htm](http://www.fwmurphy.com/support/warranty.htm)

## Basic Operation

**SDB500, SDB501 and SDB1000:** When the indicating pointer on the SDB touches the adjustable contact, a one-wire-to-ground circuit is completed to shut down the equipment and/or actuate audible or visual alarms. Proper relays or Tattletale® annunciators (magnetic switches) must be incorporated into the system.


**SDB500EX:** When the temperature rises to the preset trip point, the pointer engages an internal SPDT snap-switch to close/open circuits.

## Optional Thermowells

Thermowells (separable sockets) are available to facilitate maintenance of a temperature Swichgag instrument and to protect the temperature sensing bulb from extreme amounts of system pressure. For system pressures exceeding 285 psi (1.97 MPa) [19.7 bar] at 625°F (329°C) an optional thermowell is recommended for use with the SDB series. The thermowell protects the SDB bulb from system pressures up to 3000 psi (20.68 MPa) [206.8 bar] at 300°F (149°C). Two thermowell options are available: 1/2 NPT and 3/4 NPT. Thermowells can be ordered with the SDB Series Swichgag instrument or ordered separately. See How to Order.


## How to Order

Options listed below. All configurations may not be available. Call your sales representative or Enovation Controls for more information.

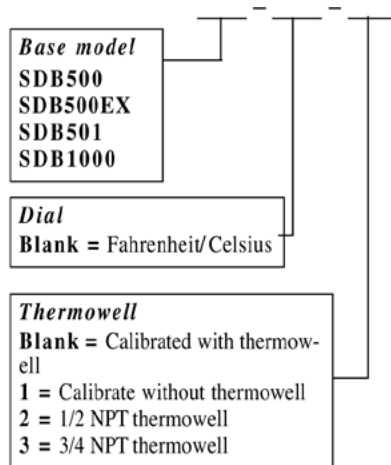


Part Number	Model and Description	Notes
10050025	Thermowell for 1/2 NPT	Optional Thermowells
10050311	Thermowell for 3/4 NPT	

## Wiring Diagrams



Contact Rating: 2 A @ 30 VAC



Contact Rating: 2 A @ 120 VAC



41343 12th Street West  
Palmdale, California 93551-1442  
661 272 4700 | www.murcal.com



www.fwmurphy.com

MurCal is an Authorized  
Master Distributor